

## mV transmitter

### 2261



- Load cell amplifier
- mV to current / voltage conversion
- Front-programmable / LED display
- Relative calibration of input span
- NPN / PNP input for external taring
- Supply for standard transducers



#### Advanced features

- A multifunction user interface consisting of three pushbuttons and a 3-digit LED display for programming.


#### Application

- The 2261 converts bipolar mV signals from transducers supplied directly by the device to standard current / voltage signals.
- The 2261 is suitable for load cell application as well as other applications such as tank filling and draining, weighing with a taring function, measurement of cable tensile force, level control, signal conversion / amplification etc.

#### Technical characteristics

- Front error LED.
- The analog input can be programmed for voltage in the range -40...100 mVDC.
- The digital signal can be selected as either NPN or PNP.
- Taring can either be by way of the digital input or from the front interface.
- The analog output can be programmed to current in the range 0...20 mA or voltage in the range 0...10 VDC.
- Short circuit protected transducer supply which can be programmed to 5...13 VDC from the front.
- Sense input (with transducer supply used) for compensation for cable resistance to the transducer.
- Mounting for a standard 11-pole socket which can be adapted for DIN rail or plate use with PR's 7023 adaptor and 7024 mounting keying.

#### Connections

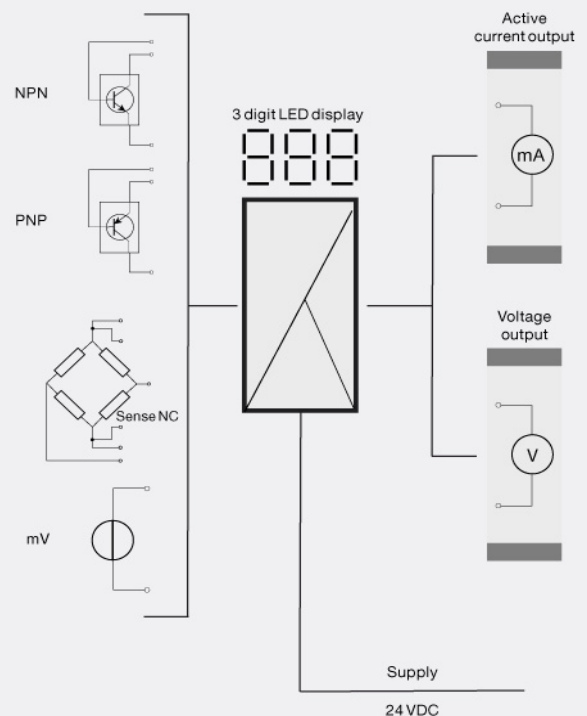

Order:

Type
2261

### Environmental Conditions

Specifications range.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP50

### Mechanical specifications

Dimensions (HxWxD).....	80.5 x 35.5 x 84.5 mm (D is without pins)
Weight approx.....	130 g

### Common specifications

#### Supply

Supply voltage.....	19.2...28.8 VDC
---------------------	-----------------

#### Response time

Response time (programmable).....	0.06...999 s
Max. power consumption.....	7.2 W
Internal consumption.....	2.2 W
Signal / noise ratio.....	Min. 60 dB
Updating time.....	20 ms
Signal dynamics, input.....	17 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< ±0.002% of span / %V
Temperature coefficient.....	< ±0.01% of span / °C
Linearity error.....	< 0.1% of span
Auxiliary voltage: Transducer supply.....	5...13 VDC
Load (max.).....	230 mA
EMC immunity influence.....	< ±0.5% of span

### Input specifications

#### Common input specifications

Max. offset.....	70% of selec. max. value
------------------	--------------------------

#### Voltage input

Measurement range.....	-40...100 mV
Min. measurement range (span).....	10 mV
Input resistance.....	> 10 MΩ
Overrange.....	0...999% of selected measurement range
NPN, digital input.....	Pull up 24 VDC / 6.9 mA
PNP, digital input.....	Pull down 0 VDC / 6.9 mA
Trig level low, NPN/PNP.....	< 6 VDC
Trig level high, NPN/PNP.....	> 10.5 VDC
Pulse length.....	> 30 ms

### Output specifications

#### Current output

Signal range.....	0...20 mA
Min. signal range.....	5 mA
Load (max.).....	20 mA/600 Ω/12 VDC
Load stability.....	≤0.01% of span / 100 Ω
Current limit.....	< 23 mA

#### Voltage output through internal shunt.....

See manual for details
*of span..... = of the presently selected range

### Approvals

EMC.....	2004/108/EC
EAC.....	TR-CU 020/2011