

SENSALERT PLUS®



**Advanced Point Gas
Detector for Critical
Safety Applications.**

+ Detection at every point.

SENSIDYNE®
Industrial Health & Safety Instrumentation

SENSALERT PLUS

Universal Point Gas Detector Accepting Combustible (Infrared or Catalytic), Toxic, and Oxygen Gas Sensors



Highest Reliability and Function

- Predictive Sensor End-of-Life Indication
- Missing or Non-functional Sensor Indication
- Sensor Test-On-Demand, with On-board Gas Generator

Intrinsically Safe Sensor Head

- Shop Calibrate and Hot-swap Gas Sensors in Classified Areas
- Mount Sensor up to 100 ft./30 m. Away Without Rigid Conduit

Intelligent SensAlert Plus Sensors

- Auto-recognition and Set-up from Sensor Memory Provides Operating Parameters and Diagnostics for All Plus Transmitters

International Performance Approvals

- Performance Tested and Certified to FM and ATEX Standards
- Unrestricted Hazardous Classified Area Installation and Operation

Flexible Installation or Retrofit

- 2-Wire and 3-Wire Transmitters with Enclosure Options
- Non-intrusive Configuration and Maintenance Interface
- Remote Sensor / Gassing, Duct Mount and Sample Draw
- Configurable Alarms: Fault Conditions and Test-on-Demand

Increased Reliability

Intelligent and dependable firmware monitors the intelligent Plus sensor for changes that could effect performance. Sensor condition and maintenance notifications are displayed locally and can be sent to a controller or facility monitoring system via on-board relays, a virtual relay (assignable to a fault current), RS-485 Modbus, or HART. This thorough monitoring provides increased reliability.

Simple to Install & Maintain


The SensAlert Plus Intrinsically Safe sensor head can be remote mounted up to 100 feet (30m) from the transmitter providing greater flexibility to position the transmitter in an personnel-accessible location while positioning the sensor closer to potential hazards. A wide range of sensors, accessories and remote gassing/sampling systems further simplify maintenance and provide installation flexibility.

Reduced Cost of Ownership


Shop or field calibrate, then swap sensors under power to minimize maintenance and calibration time. A large backlit alphanumeric display with a non-intrusive user interface allows for configuration, setup, and data review without declassifying a hazardous area. SensAlert Plus is a universal transmitter allowing facility standardization across gas types, sensor technologies, and sensor ranges.




Main Display

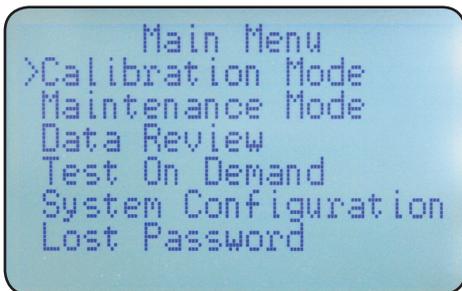


Main Menu

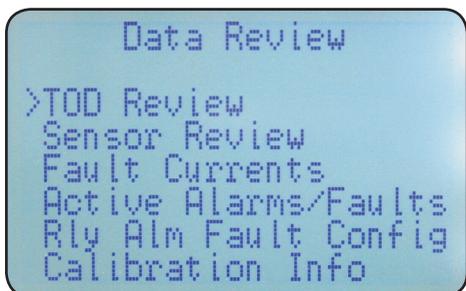


Data Review Menu

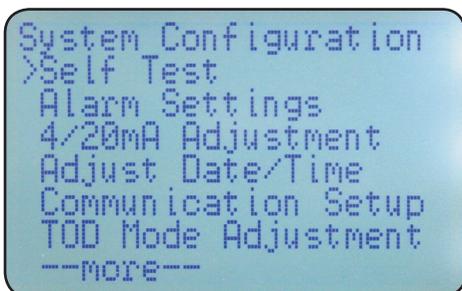


System Configuration Menu

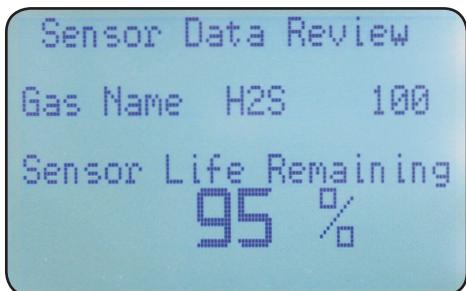


Sensor Data Review

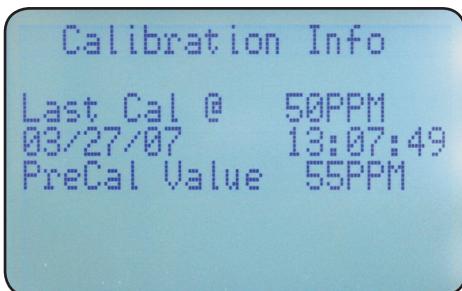

Calibration Information Screen

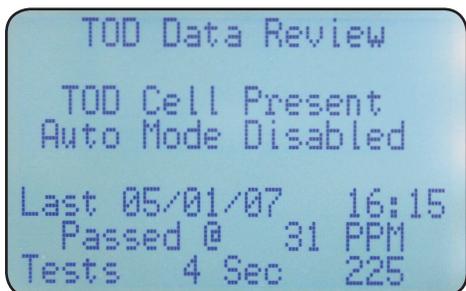


Test-on-Demand™ Data Review

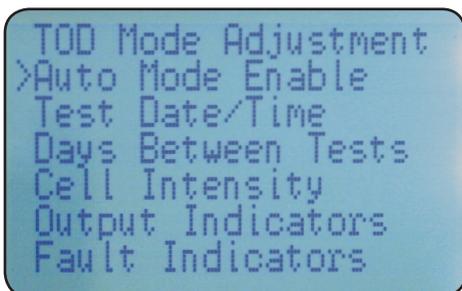

TOD Mode Adjustment



Shown with optional second strobe.

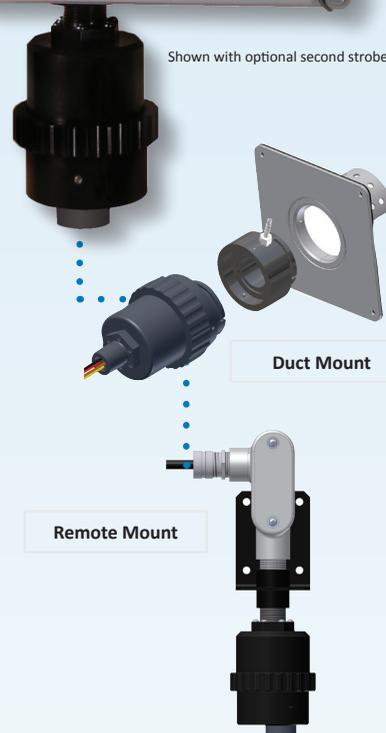


SENSALARM PLUS

SensAlarm Plus is a complete single point gas detection system comprised of a gas detection transmitter, sensor, power supply, outputs, and annunciation. This system is extremely cost-effective and easy to install. SensAlarm Plus is compatible with all SensAlert Plus sensors and accessories.

SENSALERT PLUS

Universal Point Gas Detector Accepting Combustible (Infrared or Catalytic), Toxic, and Oxygen Gas Sensors

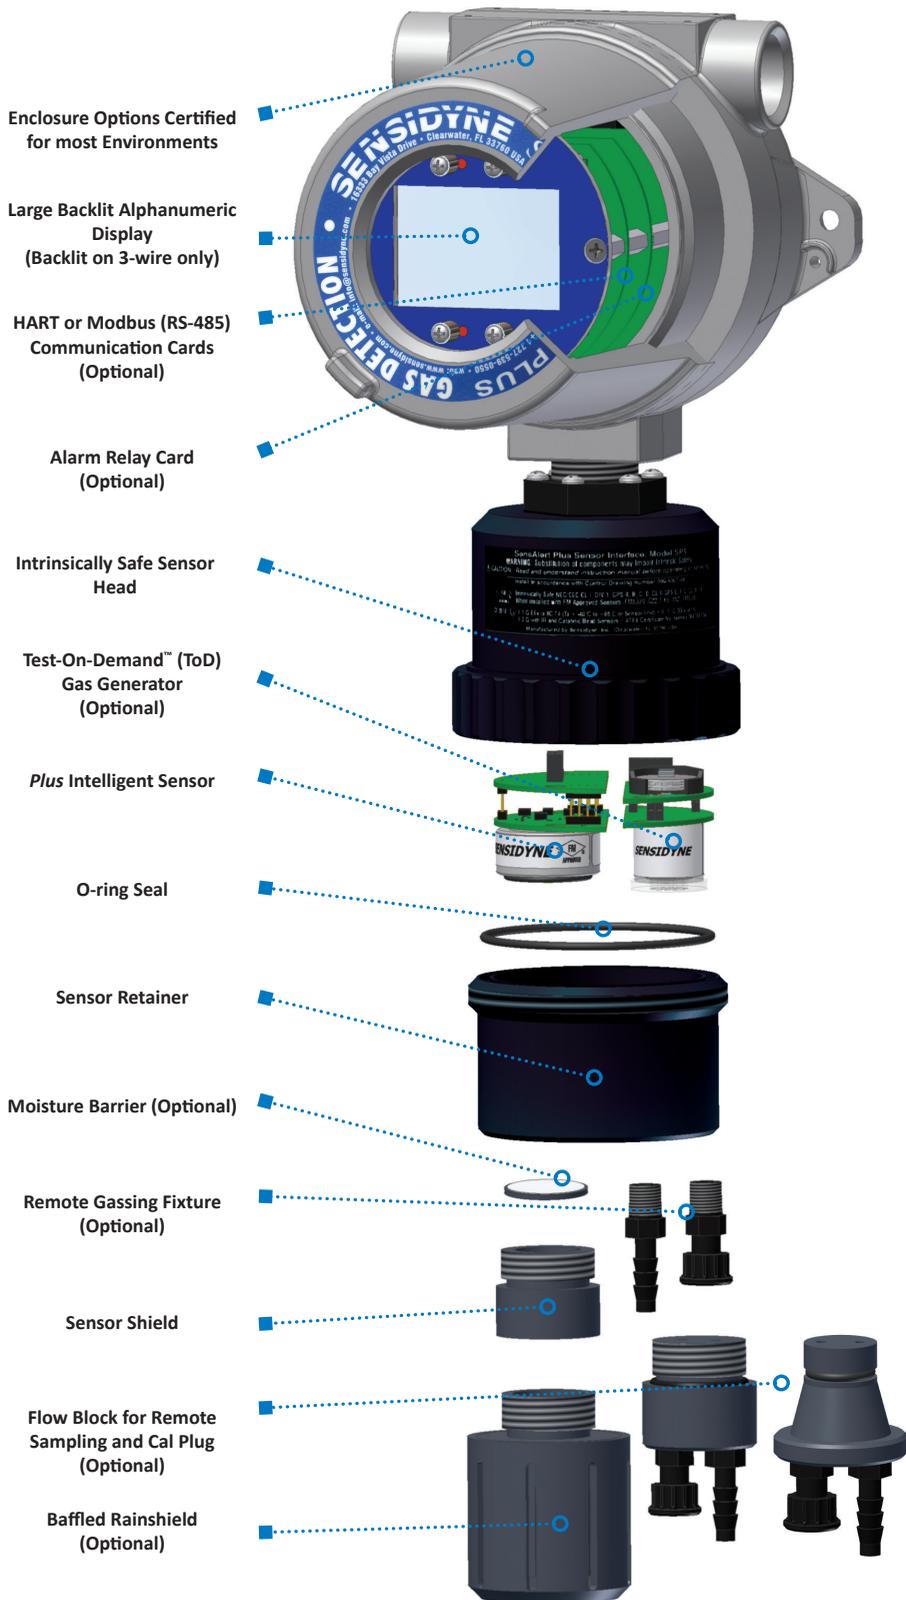

Enclosure Options Certified for most Environments

Large Backlit Alphanumeric Display (Backlit on 3-wire only)

HART or Modbus (RS-485) Communication Cards (Optional)

Alarm Relay Card (Optional)

Intrinsically Safe Sensor Head

Test-On-Demand™ (ToD) Gas Generator (Optional)

Plus Intelligent Sensor

O-ring Seal

Sensor Retainer

Moisture Barrier (Optional)

Remote Gassing Fixture (Optional)

Sensor Shield

Flow Block for Remote Sampling and Cal Plug (Optional)

Baffled Rainshield (Optional)

Technical Specifications

Sensors

Gas Sensors: Electrochemical, Infrared, Catalytic Bead
Test-On-Demand Modules: Type C and Type S

Electrical

Voltage/Power:

2-Wire 24 VDC (18-30 VDC): 20 mA
3-Wire 24 VDC (12-30 VDC): 90 mA
With Opt. Relay Card and
combustible sensors: 300 mA

Output and load resistance with 24 VDC at transmitter terminals:

3 wire 4-20 mA: 600 Ω minimum
2-wire 4-20 mA: 350 Ω minimum
Relay: 3-Wire Only - One SPDT Configurable Relay
Optional Card: Three (3) SPDT Configurable Relays
Contact Ratings: 5 Amps at 115 VAC or
30 VDC Resistive

Communication Link 4-20mA current, non-isolated
2 or 3-wire options, RS-485 (Modbus), HART

Controls

Magnetic Keypad: OK, << (Go Back), ▲, ▼
Security: Password Protected Configuration Menu

Displays

LEDs: Four (4) Red, corresponding to magnetic keypad, and Alarm Relays when equipped.

Graphic LCD: 128 by 64 pixel screen (backlight on 3-wire transmitters); displays Concentration and Measuring Units, Gas Name or Type, Sensor Span, Date and Time, Tag Number and System messages or Warnings

Environmental

Temperature (Transmitter): -40°F to 158°F / -40°C to 70°C
Humidity (Transmitter) 0-90% RH, non-condensing
Temperature (Sensor): See Sensor Data Sheets
Humidity (Sensor): See Sensor Data Sheets
Moisture Resistance IP54; IP56 with optional rainshield

Enclosure Options

NEMA 4X: Polycarbonate
Dimensions: 7.5" W x 12.6" H x 6.2" D
190 mm W x 320 mm H x 157 mm D
Weight Range: 5.5-7.2 lbs / 2.5-3.3 kg
Explosion-proof Copper-free, Cast Aluminum
Physical: 5.5" W x 12.3" H x 4.6" [6.4"] D

Weight Range: 6.1-8.7 lbs / 2.8-4.0 kg

Note: Brackets indicate large dome depth.

Approval Ratings

Explosion Proof NEC and CEC Class I Div 1, Grps A, B, C, D;
Class II Grps E, F, G; Class III T4
Flame proof ATEX EEx d[ia] IIC T4 II 2 [1] G
Non-Incendive NEC and CEC Class I Div 2, Grps A, B, C, D;
(Enclosed Break) Class II Grps E, F, G; Class III T4 ATEX EEx nC [ia] IIC T4 II 3 [1] G
Intrinsic Safety NEC and CEC Class I Div 1, Grps A, B, C, D; Class II Grps E, F, G; Class III T4 ATEX EEx ia IIC T4 II 1 G
CE Mark ATEX Directive 94/9/EC
IMETRO IEC 60079-0:2006, IEC 60079-11:1999, IEC 60079-15:2007



© 2013 Sensidyne, LP — SAPDS-Rev. B 09.13.11

